


RRC-PMM20

Power Management Module for integration into all applications using RRC20xx batteries


P/N:

110269 (with connector)

110354 (no battery connector)

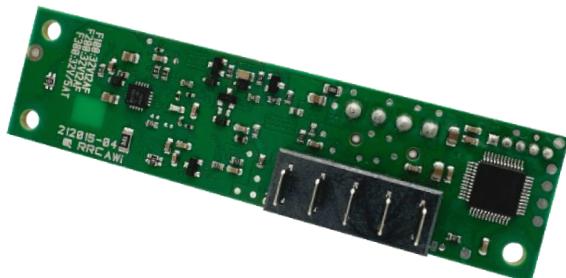

with connector

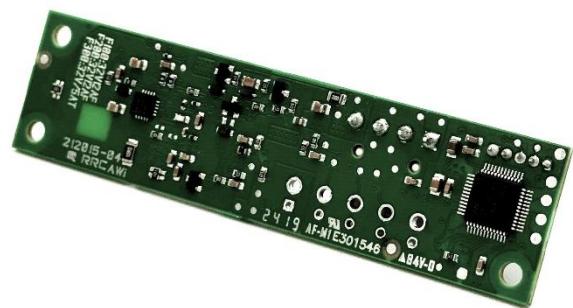

Picture only for reference

no battery connector (-NC)



The PMM20 enables internal charging of batteries and facilitates a seamless switch between mains and battery power, ensuring uninterrupted operation and reliable power backup in a space-saving design. Multiple PMMs can be used in parallel inside one device to combine more batteries.

Features & Benefits

- **Easy to design in**
 - Easily integrable into slot design
 - Integrated 180° battery connector for different connection options
 - Maximum flexibility: Various mounting options
 - Small footprint & slim design to not waste space within the application
 - wide DC input voltage range to perfectly match the application's needs
- **Plug & Play available embedded charging solution for RRC standard battery packs**
 - Time to market: no development time, immediate product availability
 - No NRE: no additional development, approvals, or design costs
 - Low total cost of ownership
- **Power management functionality**
 - Seamless switch between mains and battery power
 - Up to 40W charging power in power supply mode
- **Fully compliant with Smart Battery Specification**
 - SMBus communication with battery and host
- **Worldwide certified for industrial and medical applications**
- **Configurable**
 - Programmable limits for input current, charging current and charging voltage
 - Status signal can directly drive a LED

Characteristics

Input (Power Supply Output)								
Input voltage range	7.50V – 24.00V, min. Battery charge voltage +1.00V							
Input power	240.00W max.							
Input current	10.00A max.							
Input fuse	12A							
Protection	Reverse polarity, short current							
Application Output								
Output voltage range	Equal to DC input voltage if external DC power supply is present. Equal to battery voltage if no external DC power supply is present.							
Total output power	168.00W max. in battery mode 160.00W max. in power supply mode							
Output current	10.00A max.							
Output fuse	12A							
Power Management								
Automatic power source selection with seamless transition between ext. DC power supply and battery								
Battery Input / Output								
Battery charge voltage	Up to 17.40V							
Battery charge current	Up to 3.60A							
Battery charge power	Up to 40.00W							
Battery discharge current	10.00A max.							
Protection	Battery short circuit, over-temperature, over-voltage, over-current & reverse polarity							
Standby current	300µA							
Environmental Condition								
Operating Temperature	-20° to 60°C							
Transport & Storage Temperature	-20° to 60°C							
Relative Humidity	5% - 95% non-condensing							
Altitude	5000m for operation and storage							
Recommended Voltage for External AC/DC Power Supplies								
Battery architecture	1SxP	2SxP	3SxP	4SxP				
DC input voltage	7.50VDC	12.00VDC	15.00VDC	19.00VDC				
Power supply wattage @ 4.00A max input current	≥30.00W	≥48.00W	≥64.00W	≥80.00W				
Power supply wattage @ 8.00A max input current	≥60.00W	≥96.00W	≥128.00W	≥160.00W				
Regulatory Approvals								
International	Test report and certificate acc. IEC62368-1							
Europe	CE, UKCA (EMC)							
USA	FCC (EMC)							
Environmental	RoHS REACH WEEE							

PRODUCT DATA SHEET

RRC-PMM20



Mechanical Details	
Board dimensions (LxWxH)	~87mm x 22.40mm, without cables and connectors With three mounting holes
Weight	See below
Battery Connector	See below
Input/Output Connector	1x 90° / 4pin JST style header on PCBA
Communication Interface	90° / 5pin JST style header on PCBA with 2xSMBus lines, GND and 2xGPIO

Version Differences	RRC-PMM20	RRC-PMM20-NC
Product Number	110269	110354
Weight	~16g	~14g
Battery Connector	1x battery pack accessible via 180° mating connector for RRC20xx batteries	no battery connector
Regulatory Approvals	All above and additional ANSI/AAMI ES60601-1:2005 + A1:2012 + A2:2010	All above

To facilitate a fast design-in process for developers, RRC provides 3D data and detailed specifications of the power management module RRC-PMM20 and RRC smart batteries. For an application note related to the power management module with additional details, contact your RRC representative. For further information on the RRC smart batteries, please refer to the RRC website (www.rrc-ps.com).

Germany/HQ	USA	Hong Kong	China	Vietnam
RRC power solutions GmbH	RRC power solutions Inc.	RRC power solutions Ltd.	RRC power solutions Ltd.	RRC POWER SOLUTIONS COMPANY LIMITED
Technologiepark 1 66424 Homburg / Saar	18340 Yorba Linda Blvd., Suite 107-437 Yorba Linda, CA 92886	S-V,6/F, Valiant Industrial Centre 2-12 Au Pui Wan Street Fo Tan, N.T., Hong Kong	Room 1306, C Building, Tianan International Building, Renmin South Road, Luohu District, Shenzhen 518021	Block C, Lot CN4 Dinh Vu - Cat Hai Economic Zone, Dong Hai 2 Ward Hai An District 180000 Hai Phong City
+49 6841 98090 sales@rrc-ps.com	+1 714 777 3604 usa@rrc-ps.com	+852 2376 0106 hkrrc@rrc-ps.cn	+86 755 8374 1908 hkrrc@rrc-ps.cn	vietnam@rrc-ps.com