

SMBus Battery Cable

Battery Connector with 7-wires

P/N: 400665



Features

- Extension cable for battery applications
- Suitable for use with RRC's Standard Battery Packs RRC204x and RRC205x

Specification


Connector Pin N°	Wire Color	Wire Gauge	Signal Name
1	Black	AWG22	Bat -
	Black	AWG22	
2	Brown	AWG24	SMBus-T
3	Green	AWG24	SMBus-D
4	White	AWG24	SMBus-C
5	Red	AWG22	Bat +
	Red	AWG22	

Specification	Value
Bending Radius	10mm

Material	Value
Cable	UL2464, 22AWG*4+24AWG*3
Hard Part Molding	"PP" or "PVC", 30P
Soft Part Molding	"PVC", 90-100P

Material Compliance	
Europe	RoHS 2011/65/EU + 2015/863/EU REACH 1907/2006 WEEE 2012/19/EU POP
USA	TSCA, PROP65, PFAS
China	China RoHS

Drawings

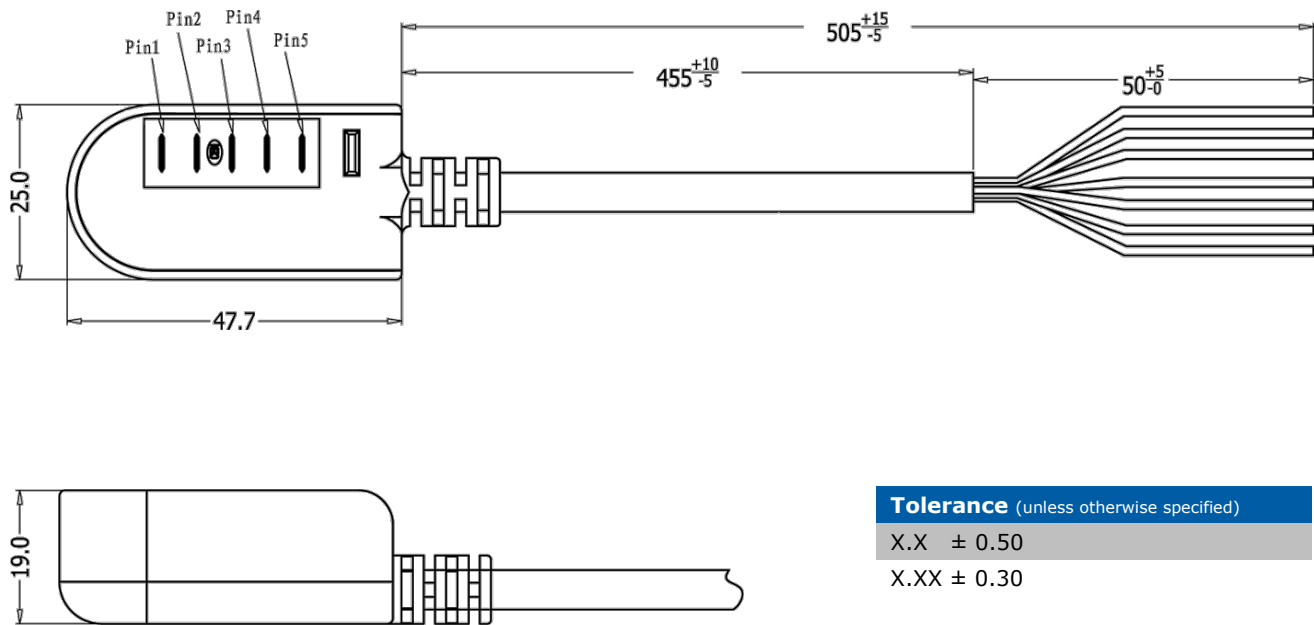

Tolerance (unless otherwise specified)

X.X ± 0.50

X.XX ± 0.30

All dimensions in mm.

Germany/HQ

RRC power solutions GmbH
Technologiepark 1
66424 Homburg / Saar

+49 6841 98090
sales@rrc-ps.com

USA

RRC power solutions Inc.
18340 Yorba Linda Blvd.,
Suite 107-437
Yorba Linda, CA 92886

+1 714 777 3604
usa@rrc-ps.c

Hong Kong

RRC power solutions Ltd.
Flat F43, 7/F, Wah Lok
Industrial Centre (Phase
2), 31-35 Shan Mei
Street, Fo Tan, N.T.

+852 2376 0106
hkrrc@rrc-ps.cn

China

RRC power solutions
(Shenzhen) Ltd.
Room 1603, A Building,
Tianan International
Building, Renmin South
Road, Luohu District,
Shenzhen 518021

+86 755 8374 1908
info@rrc-ps.cn

Vietnam

RRC POWER SOLUTIONS
COMPANY LIMITED
Block C, Lot CN4-01, Nam
Dinh Vu Non-Tariff and
Industrial Park (Zone 1),
Dinh Vu-Cat Hai Economic
Zone, Dong Hai Ward, Hai
Phong City, Vietnam

vietnam@rrc-ps.com